


CeramOptec®






Innovative Fiber Optics Every Step of the Way™

INDUSTRIAL

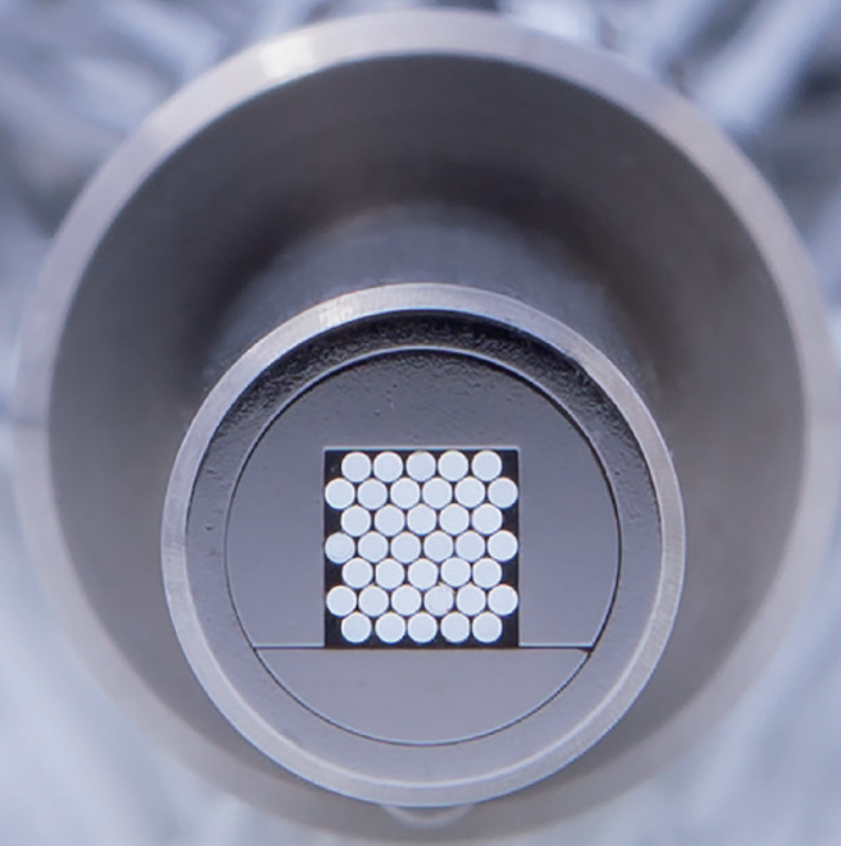



- 05 A full range of services for your needs
- 06 All-silica preforms
by POVD and PCVD procedures
- 08 Fiber overview
- 09 Safety Fiber
- 10 Optran® UV, Optran® WF, Optran® UVNS, Optran® WFNS
Silica / silica fiber with optional buffers
- 11 Optran® Ultra WFGE
Ge-doped silica / silica fiber
- 12 Optran® UVNCC, Optran® WFNCC
Silica / silica non-circular core fiber
- 14 Optran® UVNSS
Silica / silica fiber with hermetic carbon layer
- 15 Optran® UVWFS broadband fiber
Silica / silica fibers for applications from UV-C to IR-B
- 16 Optran® HUV, Optran® HWF
Silica fiber with hard polymer cladding
- 17 Optran® PUV, Optran® PWF
Silica fiber with silicone cladding
- 18  Optran® IR
Silica / silica fiber
- 19 Multi-Core Optical Fiber
Silica / silica Concentric Core and Separated Core Fibers
- 20 Metal Coated Silica Fibers
Silica / silica fibers with Metal Coating
- 21 Comparison of attenuation values
- 24 Fiber bundles
- 25 Fused-end bundles
- 28 Fiber cables
- 29 Fiber taper products
- 30 Instructions for use
- 31 Our glossary
- 32 MED Products

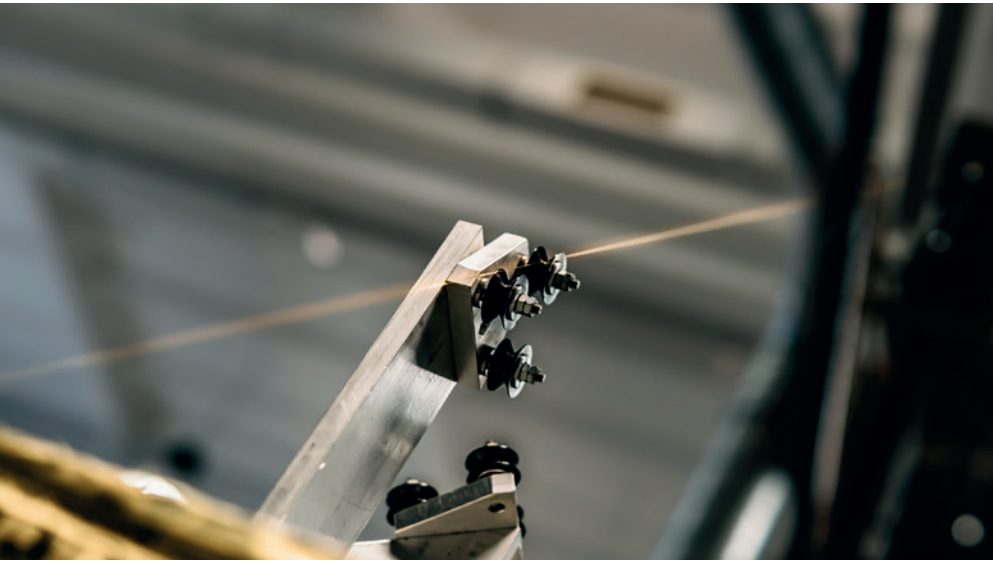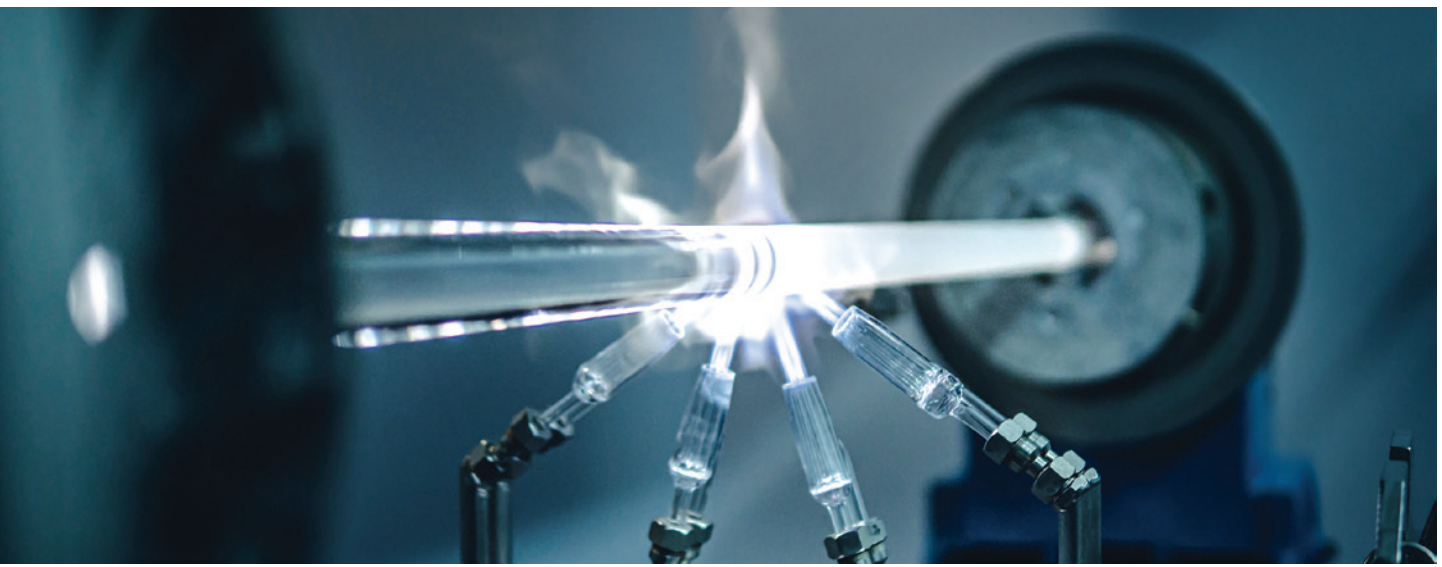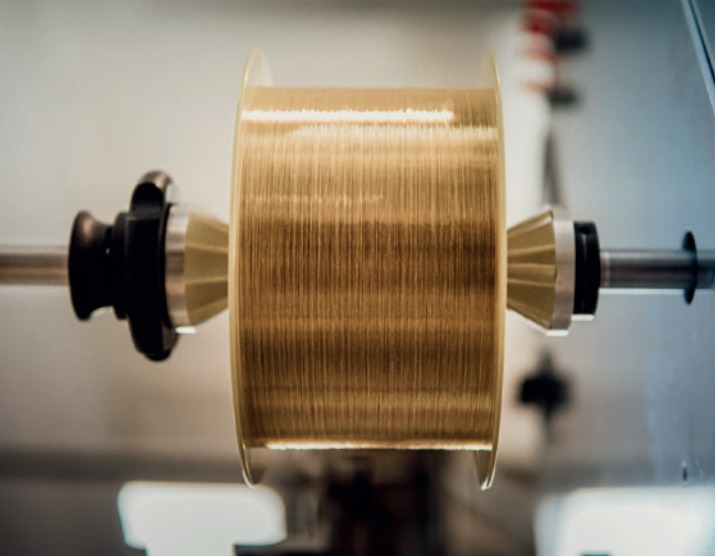

A full range of services for your needs

CeramOptec® offers customised solutions in fiber optic technology, from individual fibers to ready-to-use cable assemblies.

With over 30 years' experience in the development and production of optical fibers and everything that goes with it, we are a trusted partner for industry and research. We develop our precision-made solutions in-house, from preform manufacturing to finished cables and bundles, as this allows us to provide you with effective, expert support and meet your individual requirements efficiently. We offer a one-stop solution for all your fiber optics needs. Many prestigious clients rely on our products. We hope that this brochure will provide you with a sound basis for your decision, and we would be delighted to tell you more about our products and processes in person.

Your advantages

- Over 500 Optran® fibers in stock
- Non-standard diameters and NA values available
- Option of fully customised fiber production
- A complete solution for all your performance needs
- ISO 9001 compliant manufacturing environment
- CE mark

From initial enquiry to the finished product



ENQUIRY



TECHNICAL
DEVELOPMENT



PROTOTYPING



PRODUCTION

All-silica preforms by POVD and PCVD methods




As one of the few suppliers on the market, CeramOptec® covers the entire manufacturing chain from the preform to full fiber assembly. The preform largely defines both optical properties and the geometry of the all-silica fiber drawn from it.

CeramOptec® utilizes POVD and PCVD plasma technologies for the deposition of fluorine doped silica layers on a core material. We achieve a refractive index difference between the deposited material and pure silica core of -0.028 . The fibers drawn from the POVD and PCVD preforms differ significantly in their characteristics. Our primary deposition technology for all Non Circular Shape and Non Circular Core fibers is PCVD. PCVD fibers are identifiable by the additional letters NS in our catalogue.


The use of two different deposition technologies for the production of preforms opens up a wide range of technical options and enables us to manufacture particularly demanding special shapes.

POVD procedure

Plasma Outside Vapor Deposition

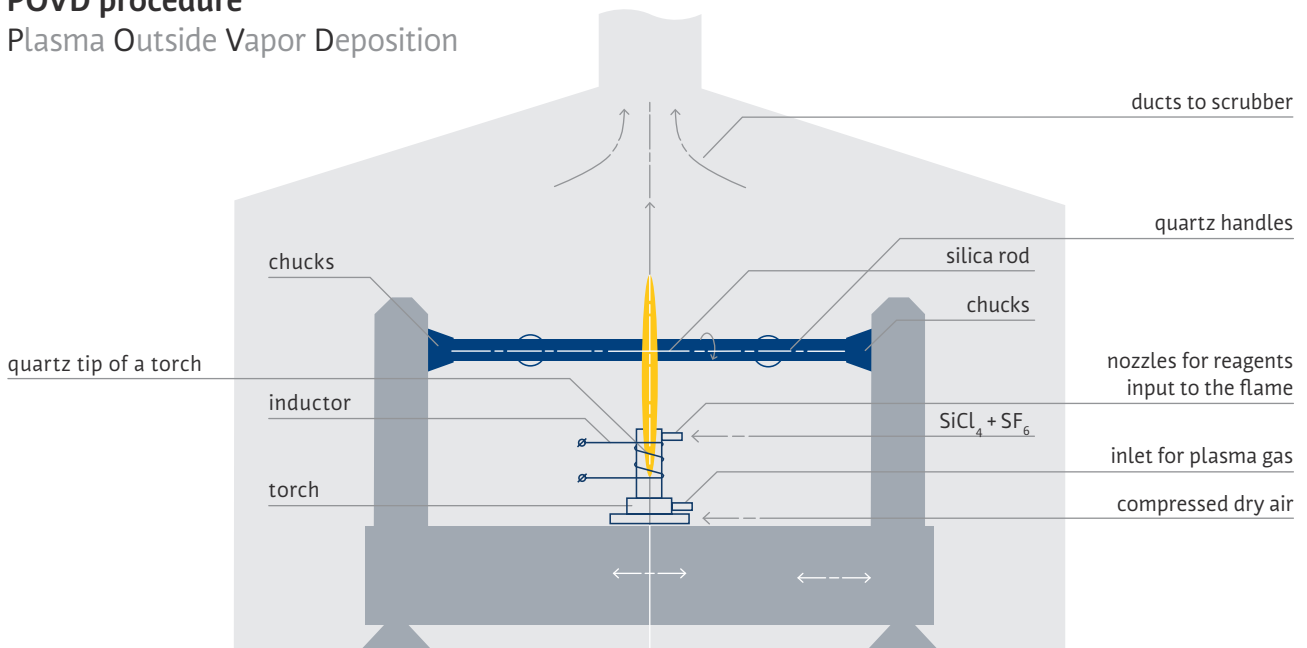**PCVD procedure**

Plasma Chemical Vapor Deposition

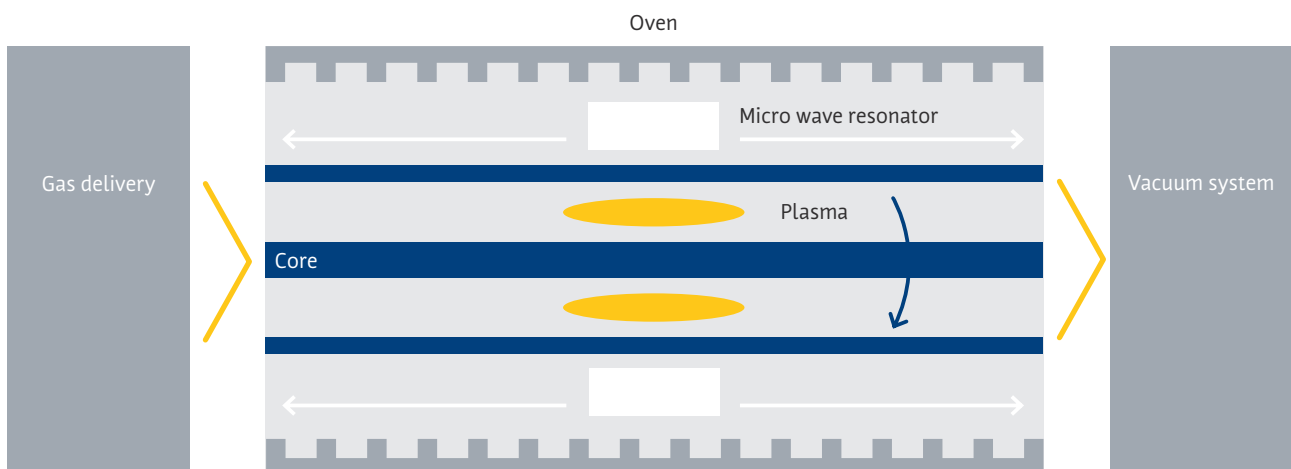
**Technical data**

Numerical aperture (NA)	0.12 ± 0.02 0.22 ± 0.02 0.28 ± 0.02 or customised
Preform diameter	20–40 mm
Standard core / cladding ratios	1:1.04 1:1.06 1:1.1 1:1.15 1:1.2 1:1.25 1:1.4 or customised
OH content	high (> 700 ppm) low (< 1 ppm) 0.25 und < 0.1 ppm available on request
Core geometry	round, square, rectangular, hexagonal, octagonal or customised
Production process	POVD (Plasma Outside Vapor Deposition) PCVD (Plasma Chemical Vapor Deposition)

Fiber overview


Choose the right one

Different types of optical waveguides are used at different wavelengths depending on their transmission properties.

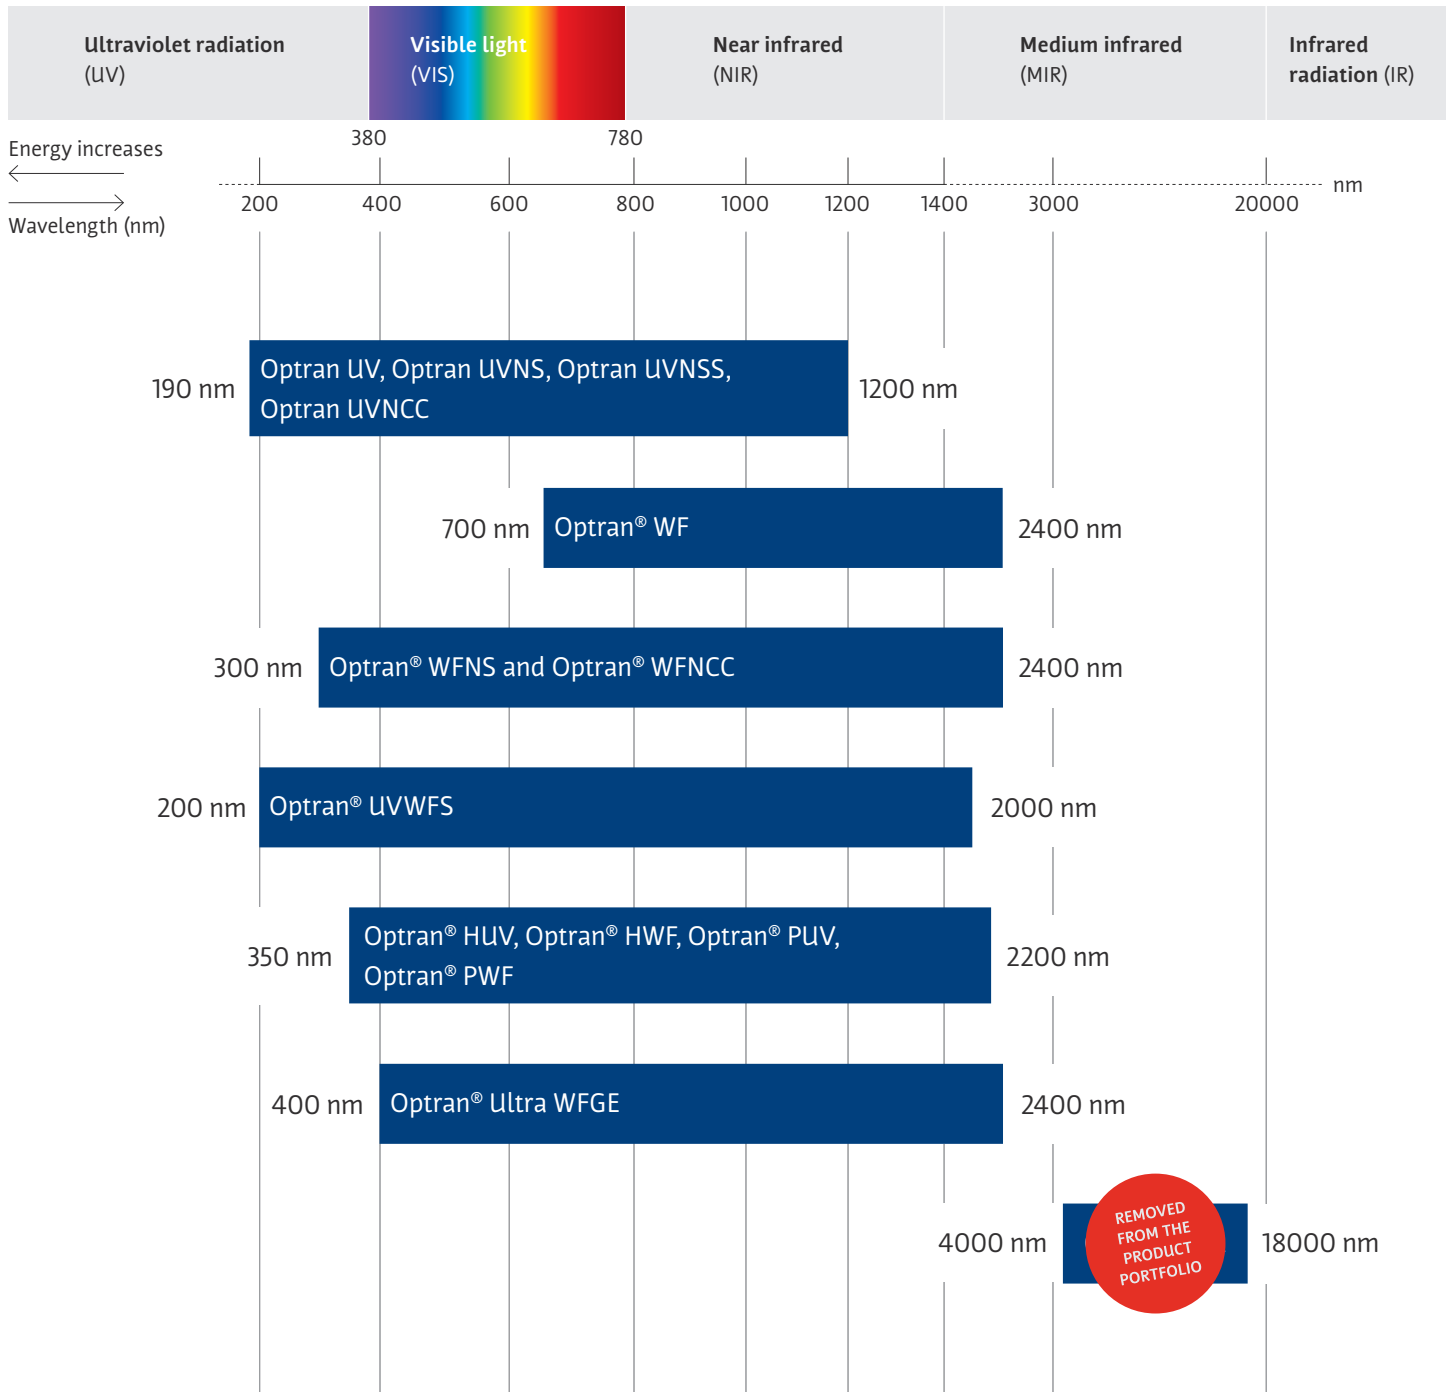

Safety Fiber

More safety for users of fiber-coupled high-performance lasers

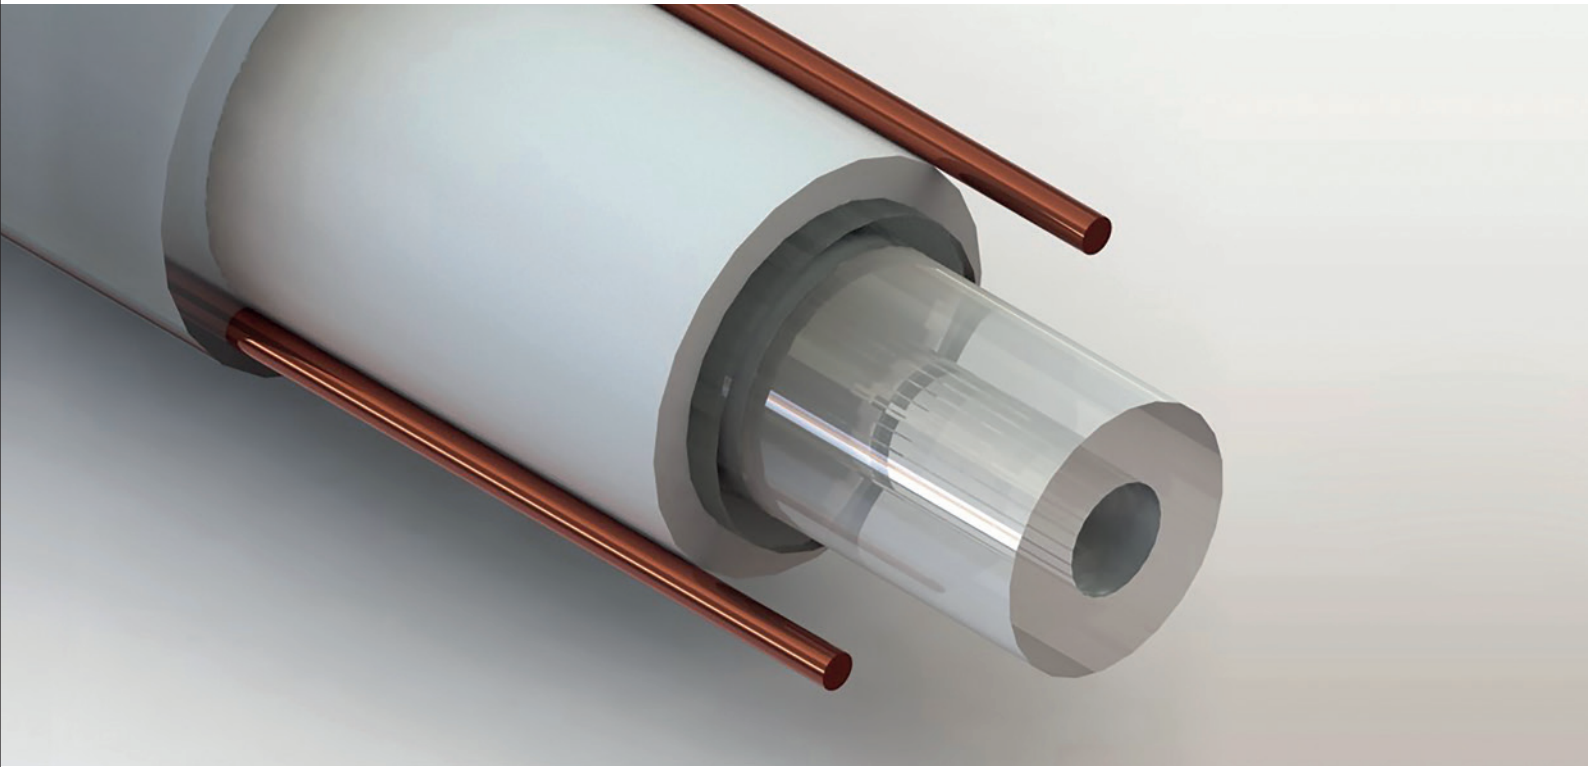

Copper wire conductors with a jacket facilitate the design of active protective devices

A new fiber design from CeramOptec® increases user safety in connection with fiber-coupled high-performance lasers. Copper wires in a polyamide jacket support the configuration of active protective devices that interrupt the laser circuit in the event of fiber breakage or connection problems and protect the user from leaking radiation.

Since the two copper wires are applied together with the polyamide sheathing after the fiber drawing process, the new fiber concept can be implemented for all standardized CeramOptec® glass fibers. All-rounders such as the standard Optran® UV/WF fibers are also available as safety fibers, as are the homogenizing Optran® NCC fibers with polygonal core geometry. For optimum coverage of all bending radii and temperature zones, safety fibers are available with copper wire conductors of 50, 100 and 150 micrometers. Custom configurations are also available on request.

Optran® UV, Optran® WF, Optran® UVNS, Optran® WFNS Silica / silica fiber

Superior performance and fiber optic properties from UV to IR wavelengths: CeramOptec®'s Optran® UV/WF fibers are available in a range of core diameters and assemblies, tailored to your specific application needs.


Standard

Wavelength

Optran® UV, Optran® UVNS	190–1200 nm
Optran® WF	700–2400 nm
Optran® WFNS	300–2400 nm

Numerical aperture (NA)

Low	0.12 ± 0.02
Standard	0.22 ± 0.02
High	0.28 ± 0.02

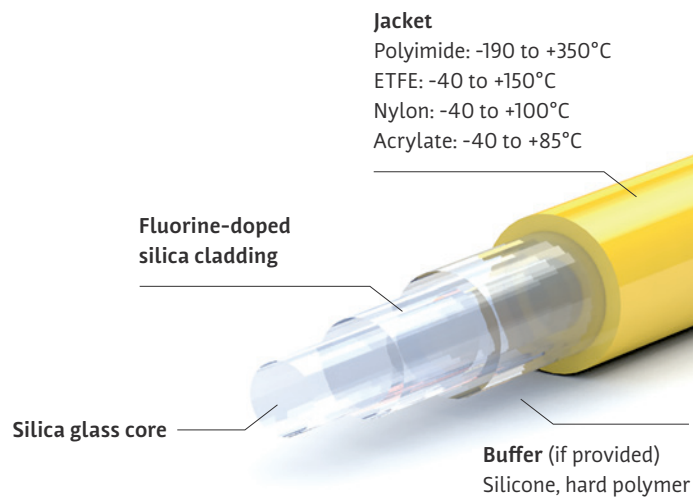

Technical data

Wavelength / spectral range	Optran® UV: 190–1200 nm Optran® WF: 300–2400 nm
Numerical aperture (NA)	0.12 ± 0.02 0.22 ± 0.02 0.28 ± 0.02 or customised
Operating temperature	-190 bis +350°C
Core diameter	Available from 25 to 2000 µm
Standard core / cladding ratios	1:1.04 1:1.06 1:1.1 1:1.15 1:1.2 1:1.25 1:1.4 or customised
OH content	Optran® UV: high (> 700 ppm) Optran® WF: low (< 1 ppm) Fibers with OH contents < 0.25 ppm are available upon request
Standard proof test	100 kpsi (nylon, ETFE, acrylate jacket) 70 kpsi (polyimide jacket)
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Product code	See glossary, p. 31
Attenuation values	in relation to wavelength: see p. 21

Applications

First choice for applications including spectroscopy, medical diagnostics, medical technology, laser delivery systems and many more.

Optran® Ultra WFGE

Ge-doped silica / silica fiber

The CeramOptec® Optran® Ultra WFGE fibers stand out through maximum numerical aperture values, unmatched performance and a broad spectral range. There is a large choice of core diameters and solutions tailored to your specific needs are available upon request.

High NA for demanding applications

Wavelength

Optran® Ultra WFGE 400–2400 nm

Numerical aperture (NA)

Standard 0.37 ± 0.02

Higher NA on request

Jacket

Polyimide: -190 to +350°C

ETFE: -40 to +150°C

Nylon: -40 to +100°C

Acrylate: -40 to +85°C

Fluorine-doped
silica cladding

Germanium-doped
silica glass core

Buffer (if provided)
Silicone, hard polymer

Technical data

Wavelength / spectral range	Optran® Ultra WFGE: 400–2400 nm
Numerical aperture (NA)	0.37 ± 0.02
Operating temperature	-190 to +350°C
Core diameter	Available from 50 to 1000 µm
Standard core / cladding ratios	1:1.04 1:1.06 1:1.1 1:1.15 1:1.2 1:1.25 1:1.4 or customised
Standard proof test	100 kpsi (nylon, ETFE, acrylate jacket) 70 kpsi (polyimide jacket)
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 21

Applications

First choice for applications including spectroscopy, laser technology, research, photodynamic therapy and many more.

Optran® UVNCC, Optran® WFNCC


Silica / silica non-circular core fiber

These fibers are ideal for laser applications, where the shape and homogeneity of the output beam is decisive. CeramOptec® offers rectangular core fibers with aspect ratios of up to 1:6 and regular polygon core fibers with 4 to 8 side faces as a standard product.

Homogeneous power distribution

Corner radii

The corner radius for rectangular shapes (r_4) is described as the ratio between the radius of a circle inscribed in the corner of the rectangle and the diameter of a circle inscribed within the rectangle itself (D_{in}). (See drawing below) Three types of standard radii are available for a square shape: $r_4 < 10\%$, $10\% < r_4 < 20\%$, $r_4 > 20\%$.

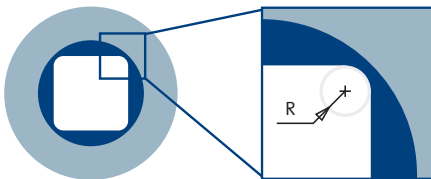

$$r_4 = R/D_{in} * 100\%$$



Corner sharpness for regular polygons with a number of sides > 4 defined by the ratio between the diameters of circumscribed and inscribed circles.

Wavelength


Optran® UVNCC	190–1200 nm
Optran® WFNCC	300–2400 nm

Numerical aperture (NA)


Low	0.16 ± 0.02
Standard	0.22 ± 0.02
High	0.28 ± 0.02

Technical data

Wavelength / spectral range	Optran® UVNCC: 190–1200 nm Optran® WFNCC: 300–2400 nm
Numerical aperture (NA)	0.16 ± 0.02 0.22 ± 0.02 0.28 ± 0.02 or customised
Operating temperature	-190 to +350°C
Core diameter	Geometries and diameters upon request
OH content	Optran® UVNCC: high (> 700 ppm) Optran® WFNCC: low (< 1 ppm) Fibers with OH content < 0.25
Standard proof test	100 kpsi (nylon, ETFE, acrylate cladding) 70 kpsi (polyimide cladding)
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 21

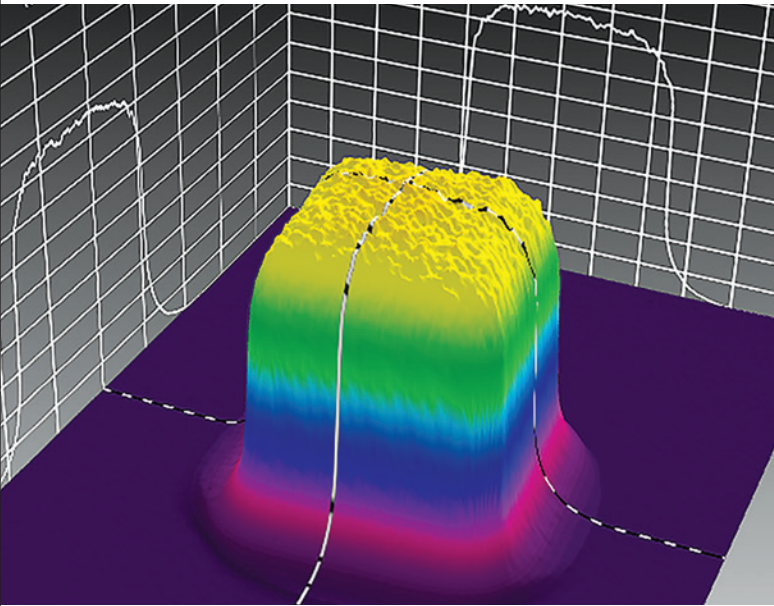


Fibers with a rectangular core geometry homogenize the intensity distribution. The image shows the intensity distribution on the focal level, using NCC fibers with core diameter of 800 × 800 μm.

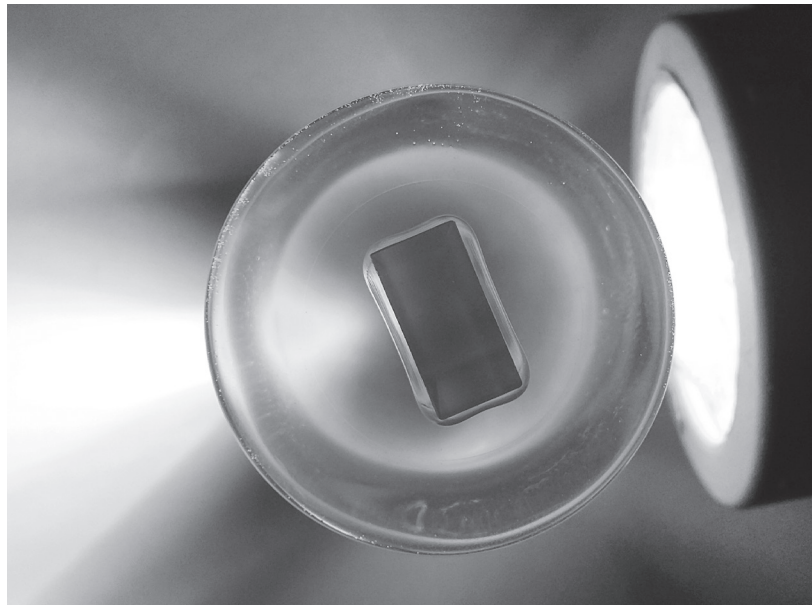

Fiber with rectangular core geometry.

Pure fused silica / F-doped fused silica square and rectangular shaped fibers

Fibers which deviate from the traditional round form with a square or rectangular shape offers advantages due to providing maximum packing density for input and output. These fibers are very suitable for connections to angular sources and receivers. The angular shaped core provides consistent short-distance homogenization input power distribution. Our angular fibers are also available in rectangular shapes with large side ratios and a small corner radius, thanks to our special PCVD-technology.

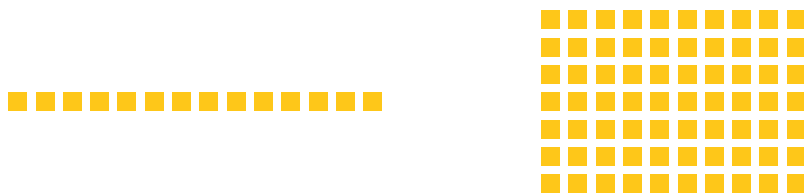

Large NCC's are ideal for applications which require a combination of flexibility and large cross sections in silica fibers, e.g. a diode laser delivery system.



Applications

First choice for applications for beam shaping e.g. including surface treatment or for lighting.

Optran® UVNSS

Silica / silica fiber with hermetic carbon layer

CeramOptec® is glad to offer a new product for the UVC spectral range. The improved solarization resistance and extra stability of UVNSS fibers opens a wide variety of applications.


High solarization resistance

Wavelength

Optran® UVNSS	190–1200 nm
---------------	-------------

Numerical aperture (NA)

Low	0.12 ± 0.02
Standard	0.22 ± 0.02
High	0.28 ± 0.02

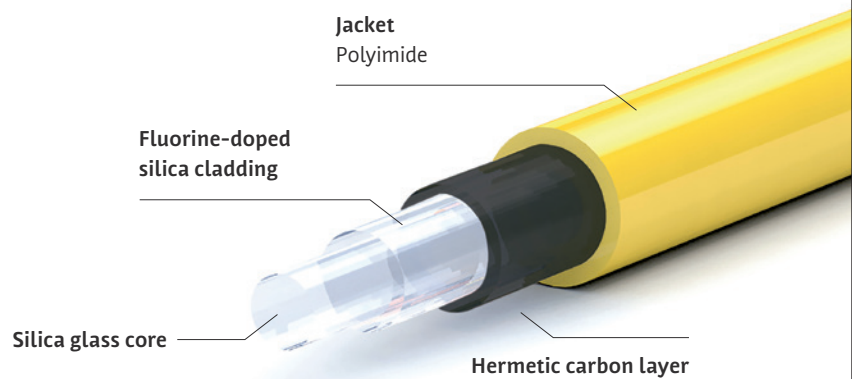

Technical data

Wavelength / spectral range	Optran® UVNSS: 190–1200 nm
Numerical aperture (NA)	0.12 ± 0.02 0.22 ± 0.02 0.28 ± 0.02 or customised
Operating temperature	-190 to +150°C
Core diameter	Available from 100 to 600 µm
Standard core / cladding ratios	1:1.06 1:1.1 1:1.2 1:1.4 or customised
OH content	High (> 700 ppm)
Standard proof test	70 kpsi (polyimide jacket)
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 300 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 21

Applications

First choice for applications including spectroscopy, semiconductor technology, laser delivery systems and many more.

Optran® UVWFS broadband fiber

Silica / silica fibers for applications from UV-C to IR-B

CeramOptec® is glad to offer a new extremely low loss fiber for the 200 nm to 2000 nm wavelength range. UVWFS fibers offer properties of both UV and WF fibers and are suitable for a wide range of applications.


Broadband

Wavelength

Optran® UVWFS	200–2000 nm
---------------	-------------

Numerical aperture (NA)

Low	0.12 ± 0.02
Standard	0.22 ± 0.02
High	0.28 ± 0.02

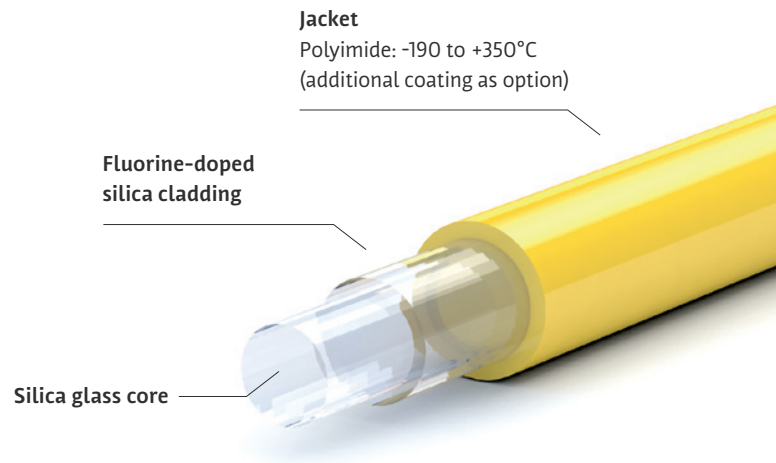

Technical data

Wavelength / spectral range	Optran® UVWFS: 200–2000 nm
Numerical aperture (NA)	0.12 ± 0.02 0.22 ± 0.02 0.28 ± 0.02 or customised
Operating temperature	-190 to +350°C
Core diameter	Available from 100 to 800 µm standard 200 µm
OH content	Optran® UVWFS: ~ 5 ppm
Standard core / cladding ratios	1:1.06 1:1.1 1:1.2 1:1.4 oder kundenspezifisch
Standard proof test	70 kpsi (polyimide jacket)
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 22

Applications

CeramOptec® UVWFS optical fiber is the first choice for many applications where you work with different wavelengths simultaneously: spectroscopy, analytical instruments, sensing applications, astronomy, aerospace and avionics, military applications and many more.

Optran® HUV, Optran® HWF

Silica fiber with hard polymer cladding

CeramOptec® offers its Optran® HUV/HWF fibers as a cost-effective alternative to silica/silica fibers. They provide high numerical aperture values, minimal bend losses and efficient connectorisation for a wide range of applications.


High NA at a low price

Wavelength

Optran® HUV/HWF 350–2200 nm

Numerical aperture (NA)

Standard	0.37 ± 0.02
High	0.48 ± 0.02
	0.52 ± 0.02
	0.57 ± 0.02

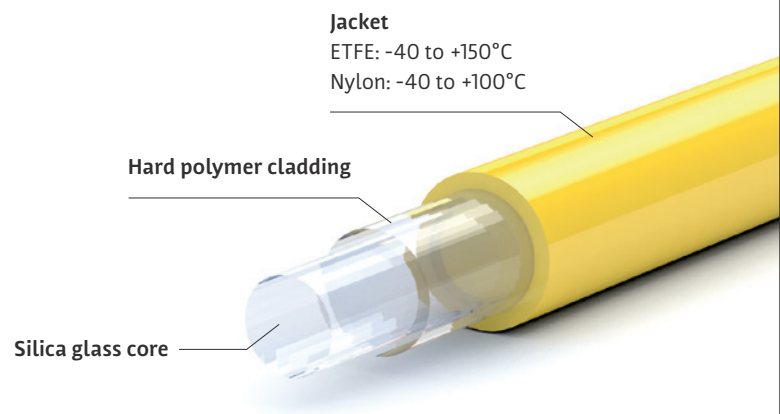

Technical data

Wavelength / spectral range	Optran® HUV and Optran® HWF: 350–2200 nm
Numerical aperture (NA)	0.37 ± 0.02 0.48 ± 0.02 0.52 ± 0.02 0.57 ± 0.02
Operating temperature	-40 to +150°C
Core diameter	Available from 100 to 2000 µm
OH content	Optran® HUV: high (> 700 ppm) Optran® HWF: low (< 1 ppm)
Standard proof test	100 kpsi
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 22

Applications

First choice for applications from illumination to photodynamic therapy and many more.

Optran® PUV, Optran® PWF

Silica fiber with silicone cladding

CeramOptec®'s silica fibers with silicone cladding ensure low-attenuation transmission from UV to NIR wavelengths. They provide a cost-effective alternative to pure silica fibers that suits a wide range of applications, from remote illumination to spectroscopy.

High NA at a low price

Wavelength


Optran® PUV / PWF 350–2200 nm

Numerical aperture (NA)

Standard 0.40 ± 0.02

Advantages

- Cost-effective (compared to silica / silica fibers)
- High concentricity
- Step-index profile
- Biocompatible material
- Sterilisable using ETO and other methods

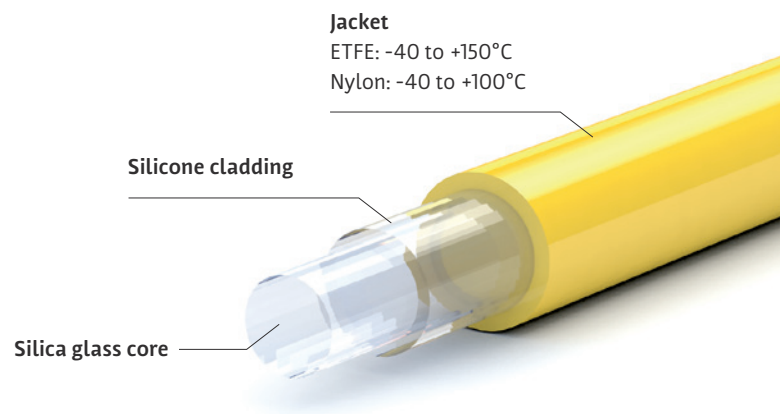

Technical data

Wavelength / spectral range	Optran® PUV and Optran® PWF: 350–2200 nm
Numerical aperture (NA)	0.40 ± 0.02
Operating temperature	-40 to +150°C
Core diameter	Available from 100 to 2000 µm
OH content	Optran® PUV: high (> 700 ppm) Optran® PWF: low (< 1 ppm)
Standard proof test	100 kpsi
Minimum bending radius	50 × cladding diameter (short-term mechanical stress) 150 × core diameter (during use with high laser power)
Attenuation values	in relation to wavelength: see p. 23

Applications


First choice for applications from remote illumination to spectroscopy and many more.

Optran® MIR

Silver halide fiber

This unique fiber, which comprises a photosensitive compound (AgCl, AgBr), is ideal for the mid-infrared (MIR) range.

**REMOVED
FROM THE
PRODUCT
PORTFOLIO**

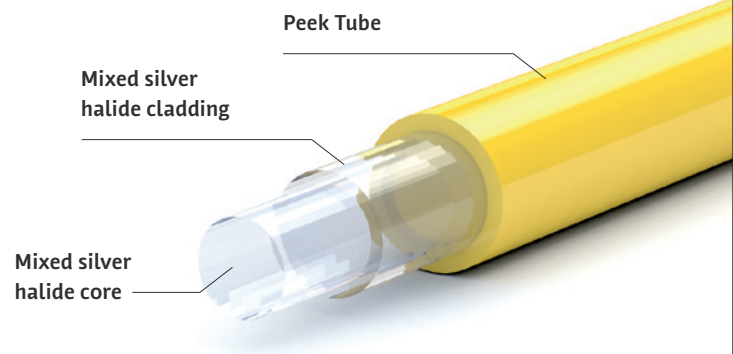

Technical data

Wavelength / spectral range	Optran® MIR: 4–18 μm
Numerical aperture (NA)	0.13 \pm 0.02 0.25 \pm 0.02 0.35 \pm 0.02
Operating temperature	-60 to +110°C
Standard diameter	Core / cladding (μm) 400 / 500 μm 600 / 700 μm 860 / 1000 μm
Calculation index (core)	2.1
Reflective losses @ 10.6 μm	25%
Minimum bending radius	100 \times cladding diameter
Highest power	30 Watt
Attenuation values	in relation to wavelength: see p. 23

Applications

First choice for applications including CO₂-laser guides, FTIR spectroscopy, laser surface treatments and many more.


Multi-Core Optical Fiber

Silica / silica concentric core and separated core fibers

Multi-Core Fiber Optics open a range of capabilities for applications in sensing, laser delivery, and more. CeramOptec® offers Concentric Core and Separated Core fiber options, fully customizable to meet your needs.

Multi-Core Optical Fiber


Fiber Cross-Section / μm

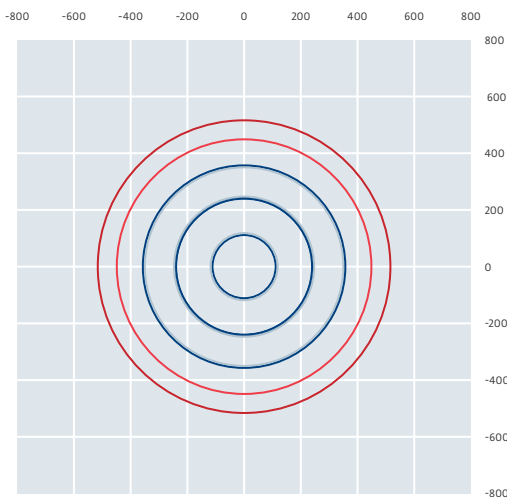

Concentric Core Fiber

Advantages: Great for Power Density Control


Fiber Cross-Section / μm

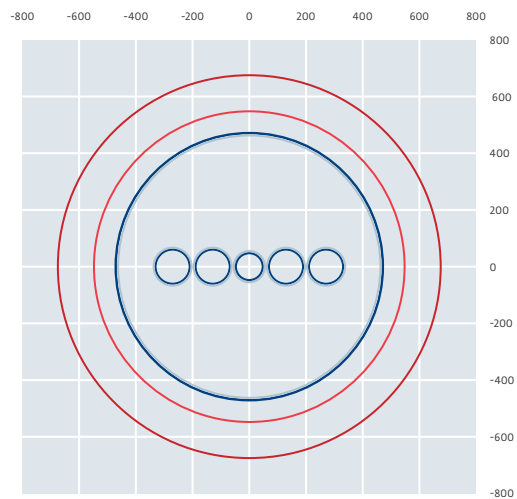

Separated Core Fiber (under development)

Ceram Optec® can produce separated core fibers upon customer request.

Advantages: Ideal for beam shaping

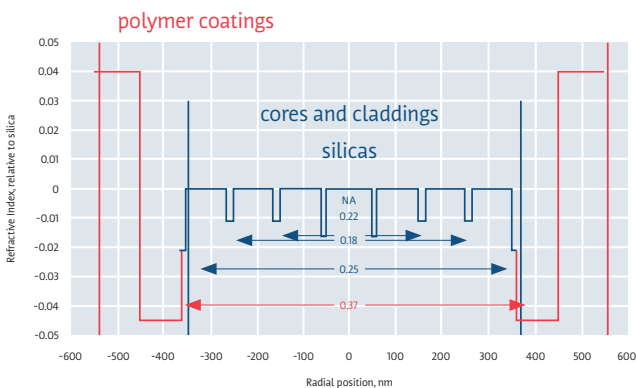

Technical data

Our multi-core fibers are fully customizable. Please contact us for more information.

Metal Coated Silica Fibers

Silica / silica fibers with metal coating

Metal coated silica fibers can withstand the highest temperatures of any fiber and are suitable for harsh environments. Available in Tin and Aluminum.

Metal Coated

Wavelength


Optran® UV	190–1200 nm
Optran® WF	300–2400 nm

Numerical aperture (NA)

Low	0.12 ± 0.02 0.15 ± 0.02
Standard	0.22 ± 0.02
High	0.26 ± 0.02 0.28 ± 0.02

Advantages

- High temperature resistance
- High chemical resistance
- Solderable
- Hermetically sealed only for Aluminum

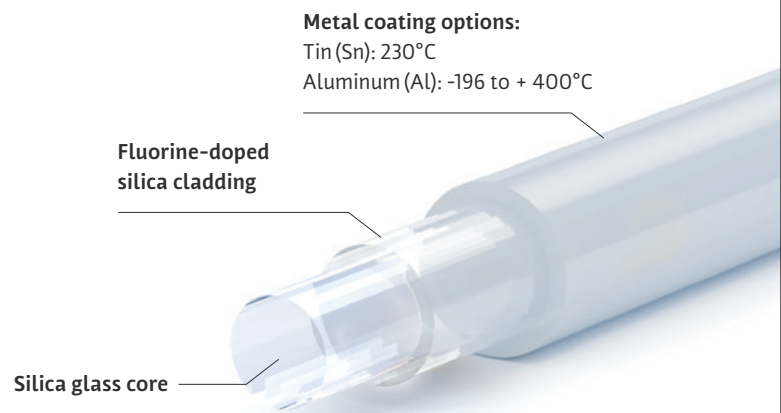


Technical data

Wavelength / spectral range	Optran® UV: 190–1200 nm Optran® WF: 300–2400 nm
Numerical aperture (NA)	0.12 ± 0.02 0.15 ± 0.02 0.22 ± 0.02 0.26 ± 0.02 0.28 ± 0.02 or customised
Operating temperature	-196 °C to +400 °C
Silica diameter	Available from 100 to 2100 µm
Tensile strength (short gauge), GPa	Tin: 6 to 9 Aluminum: 3.5 to 6
Two point bending strength, GPa	Tin: >10 Aluminum: >10
Static fatigue parameter, n	Tin: >100 Aluminum: >100
Minimum bending radius	100 × diameter (short-term mechanical stress) 200 × diameter (during use with high laser power)


At a glance

Comparison of attenuation values


Optran® UV, WF / uVNCC, WFNCC / Ultra WFGE, WFNS

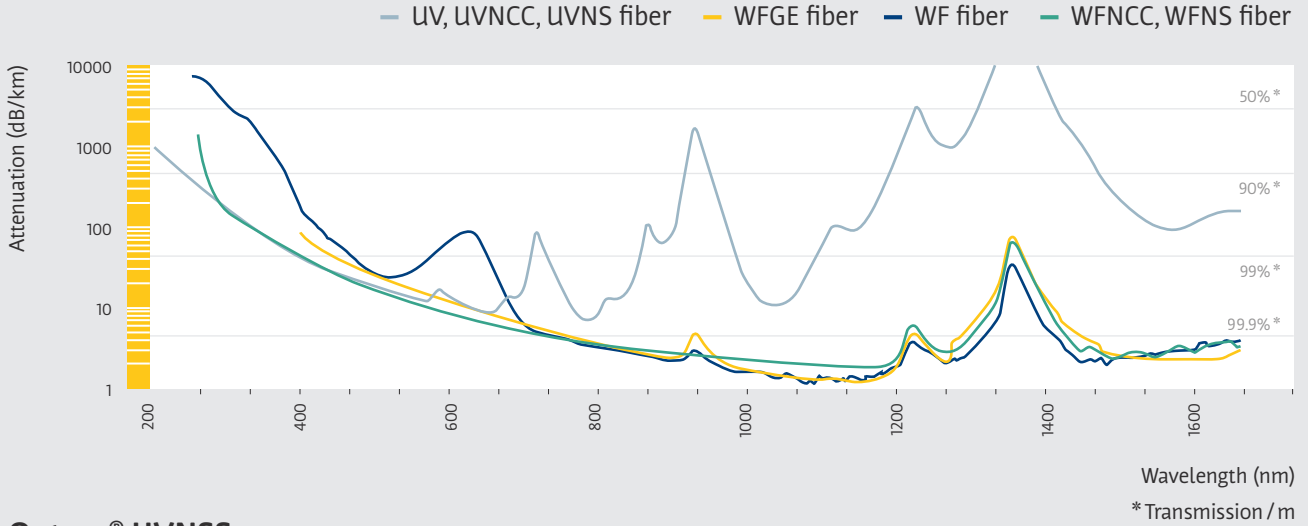


Optran® UVNSS

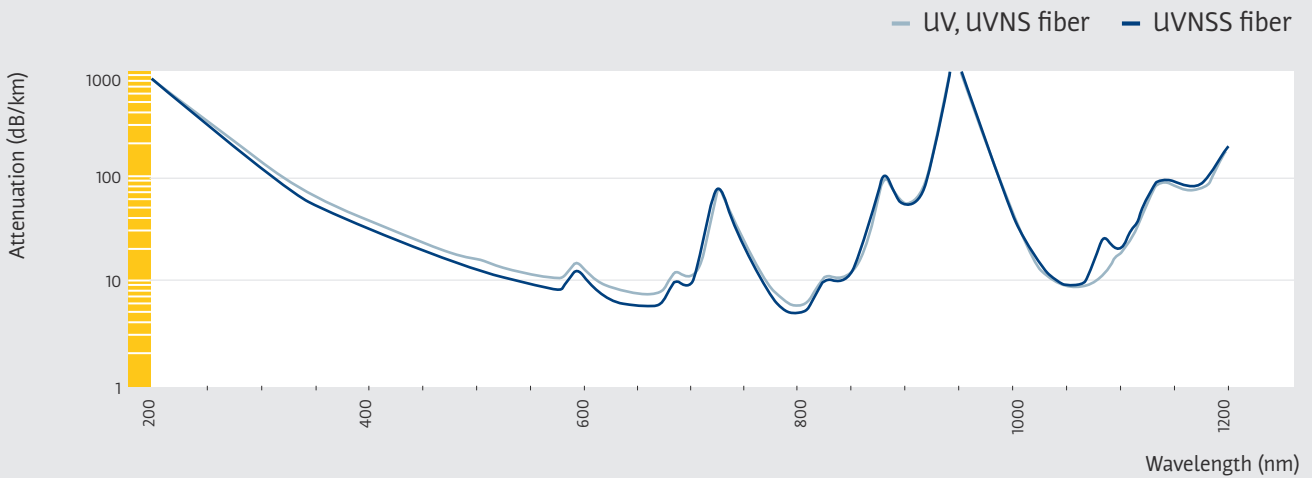



Optran® UVNSS (Comparison of solarization resistance)

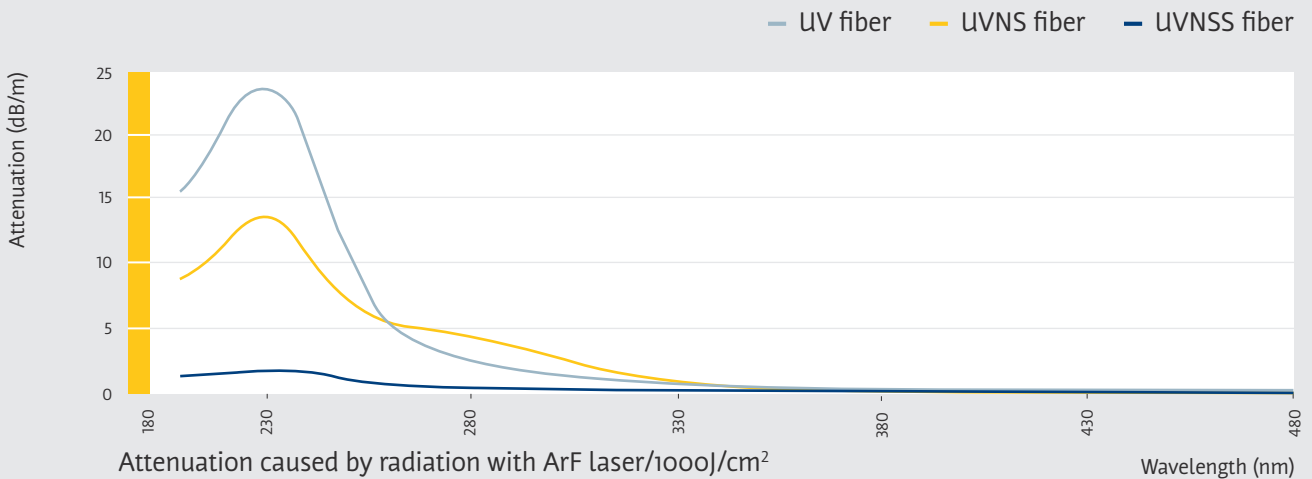

Optran® UVWFS broadband fiber

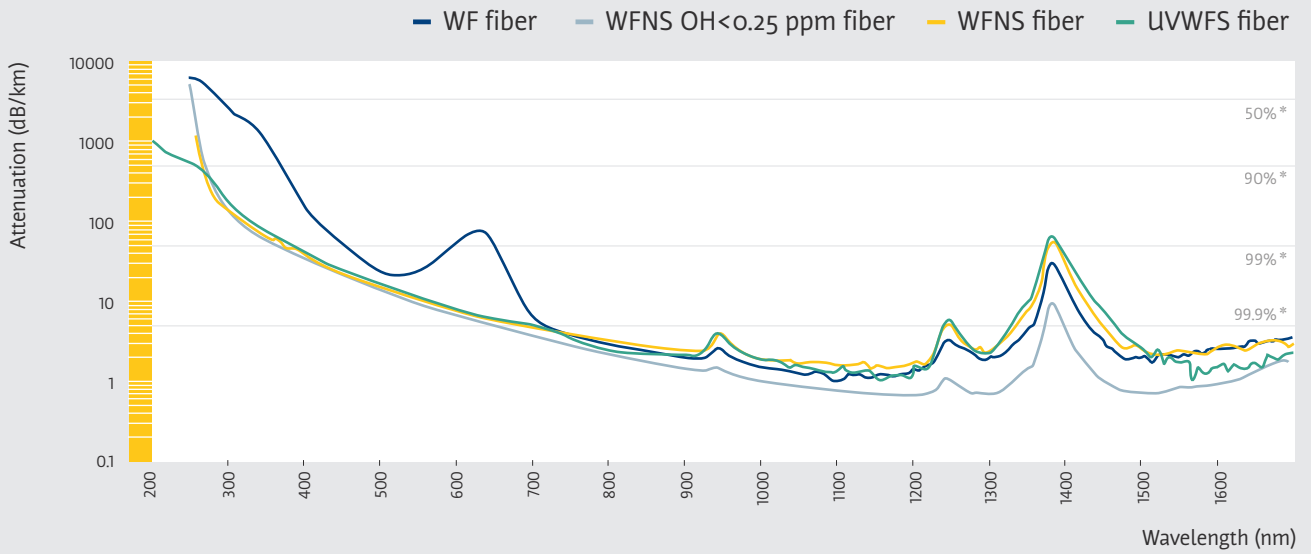



Optran® HUV, Optran® HWF

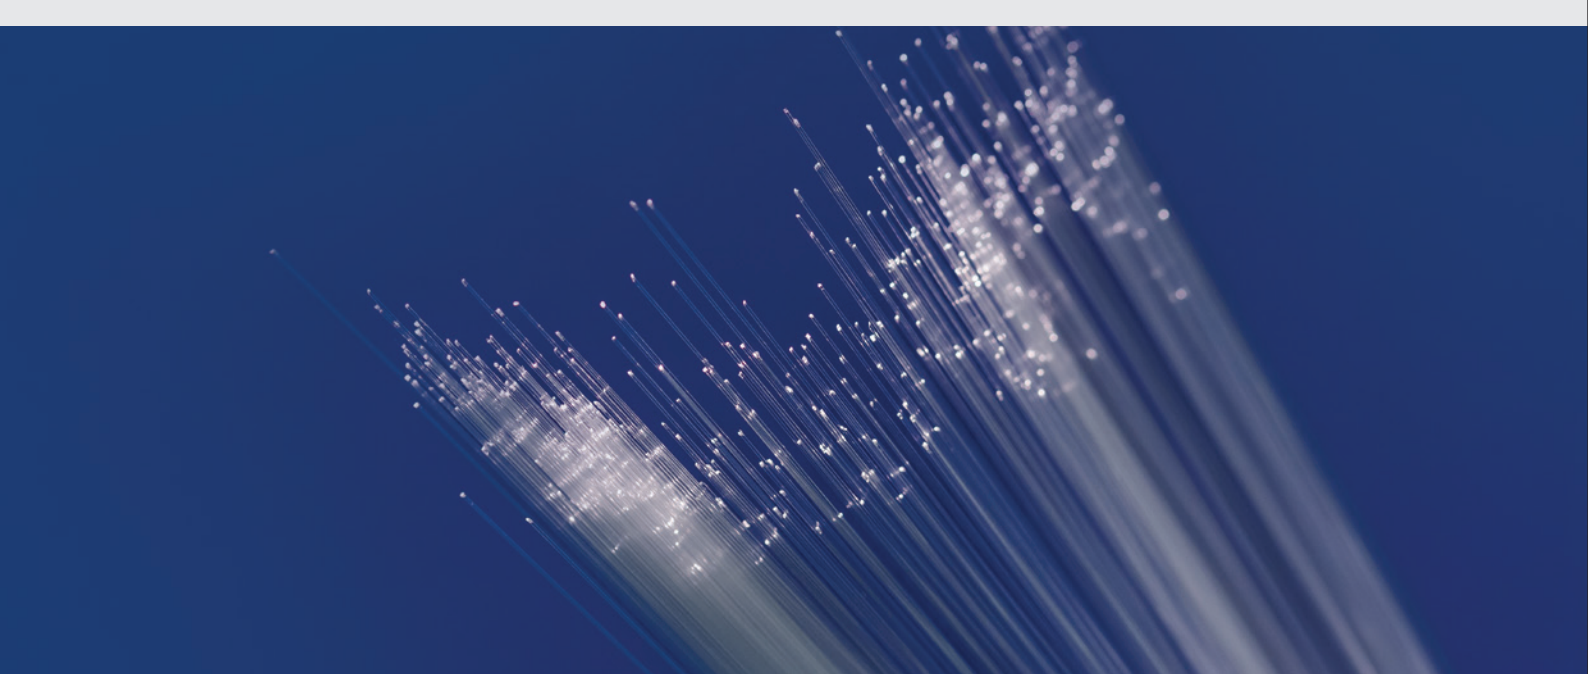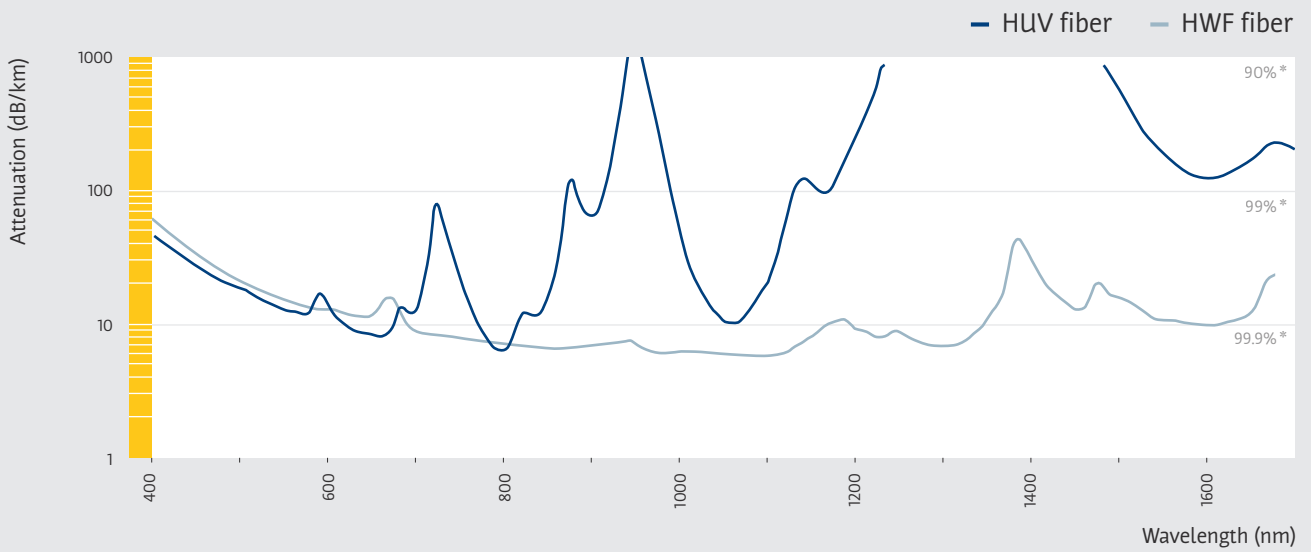

Optran® MIR





Optran® PUV, Optran® PWF

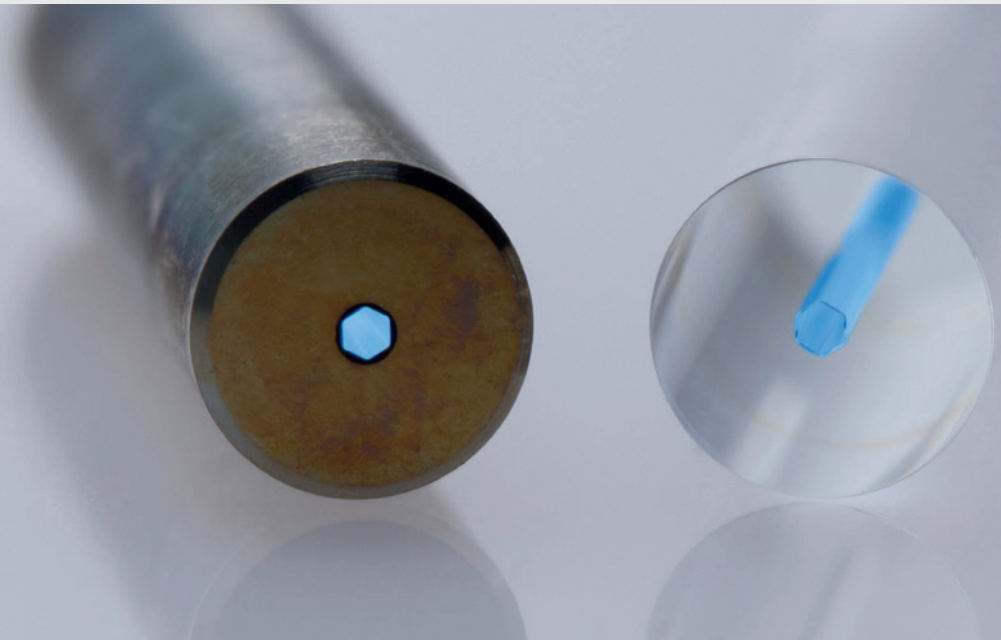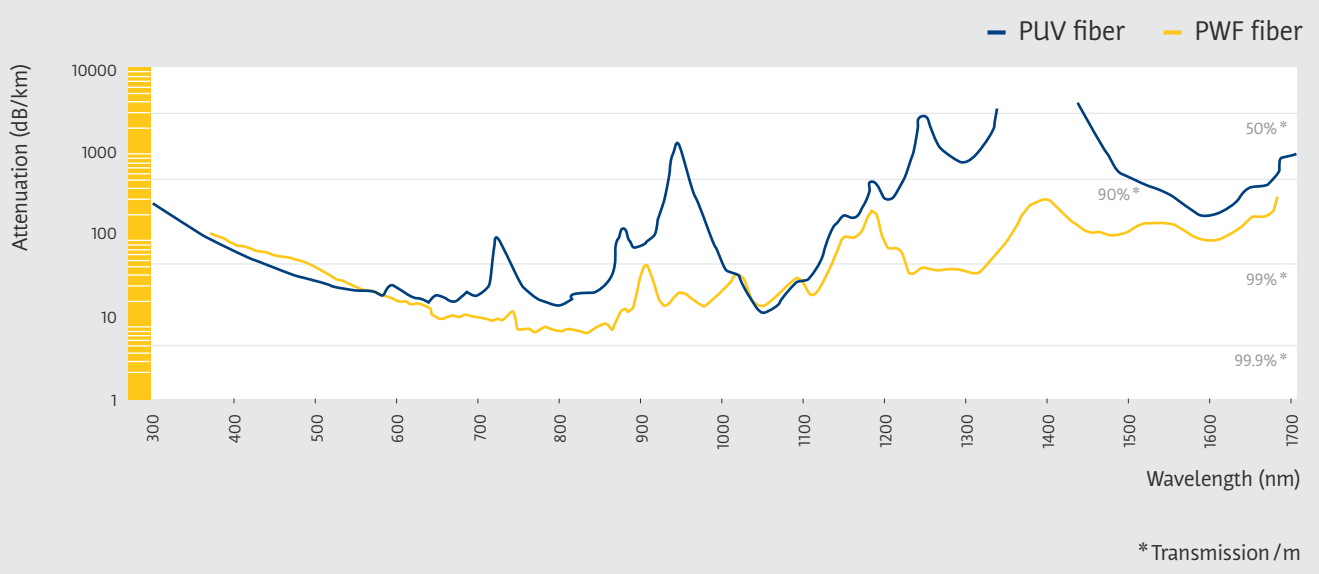

*Transmission / m

Fiber bundles

Multi-fiber assemblies

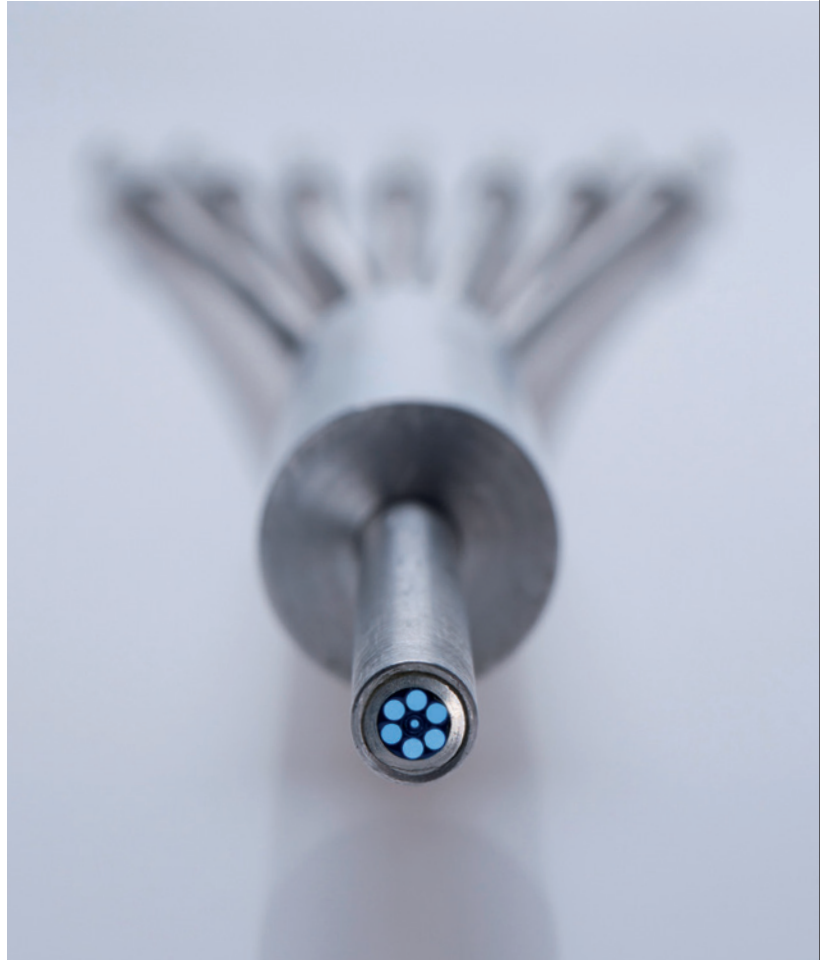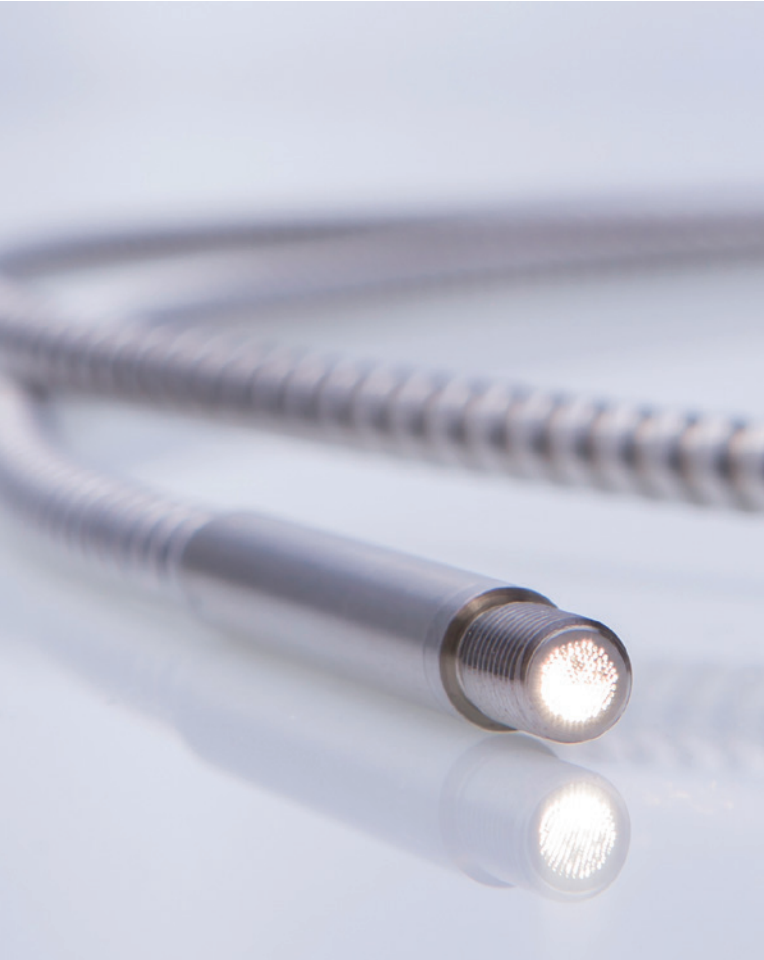

CeramOptec®'s fiber bundles are designed for superior quality and optimum fiber optic properties. We optimise your bundles for various parameters, including NA and packing efficiency. Our fiber assemblies can be flexibly configured and tailored precisely to your application needs.

Options

Available fibers	All fibers from our range
Active bundle surface geometries	Circular Semi-circular Square Rectangular Line Ring Segmented ring
Bundle design	Single-branch Dual-branch Multi-branch
Bundle variant	Glued Fused Sorted AR coated
Connectors	SMA FC/PC ST and others upon customer request

Fiber bundles

Fused-end bundles



CeramOptec®'s fused-end bundles set the benchmark for consistently high long-term performance. The fusing process completely eliminates inter-fiber spaces and thus positions CeramOptec®'s fused-end bundles among the most sophisticated fiber bundles on the market. As the bundles do not rely on adhesive, they are resistant to temperatures of more than +600°C, making them the first choice for demanding applications!

Wavelength


Fused-end bundles 190–2400 nm

Numerical aperture (NA)

Low	0.12 ± 0.02
Standard	0.22 ± 0.02
High	0.37 ± 0.02

Advantages

- High transmission
- No inter-fiber spaces
- Large active diameter
- Wide range of ready-to-use assemblies available
- Long service life
- Even distribution in multi-branch bundles
- High temperature resistance above +600°C



Bundles made from end-fused fibers show no gaps between individual fibers, since the fibers attain a hexagonal shape during the fusing process.




Fiber bundles

Overview

Gluing

Glued fiber bundles offer the greatest flexibility in terms of achievable diameters and geometries.




Sorting

Sorted fibers allow an even power distribution across several bundle arms and can increase the measuring precision thanks to spatial mapping of the fibers.




Fusion

In bundles of fused fibers all gaps between the fibers are eliminated, delivering an increase in the filling factor and thus transmission by up to 20%.



AR coating

An AR coating almost completely eliminates reflection losses at the fiber ends, which can increase transmission by about 7%.



Fiber cables

Single-fiber assemblies



CeramOptec® offers a comprehensive range of cables and high-power cables tailored to your specific application needs. As we maintain complete control over the entire process, from preform manufacturing to the finished product, we are able to supply cables that meet the most demanding requirements regarding quality and fiber optic properties.

Advantages


- Broad temperature range
- High resistance against laser damage
- Special jackets available for high temperatures, high vacuum and harsh chemicals
- All dielectric, non-magnetic design
- Various lengths available

Options

Available fibers	All fibers from our range
Connectors	SMA FC/PC ST and others upon customer request, including ferrules
Protection tubes	PVC PTFE Kevlar C-Flex Kevlar-reinforced PVC Metal Steel and others
Cable variation	AR coating possible

Fiber taper products

Optran® UV, WF, Ultra WFGE

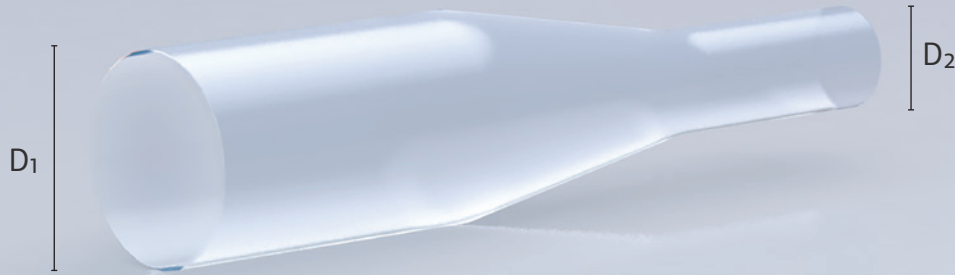

CeramOptec®'s fused tapered fibers can be deployed from the deep UV to the NIR range. Taper products are required where input and output diameters differ. CeramOptec® offers a wide range of options, including for special applications.

Advantages

- Broad temperature range
- High resistance against laser damage
- Special jackets available for high temperatures, high vacuum and harsh chemicals
- All dielectric, non-magnetic design

Formula

A tapered optical fiber acts as a beam diameter and numerical aperture converter, with the input beam being converted according to the following formula:

$$NA_2 = \frac{D_1}{D_2} NA_1$$

NA₁: Input NA | NA₂: Output NA

D₁: Input diameter | D₂: Output diameter

The output NA is limited by the NA of the fiber used, which may result in a loss of light.

Technical data

Available fibers	Optran® UV Optran® WF Optran® WFGE
Wavelength	From deep UV to NIR
Core diameter	50 to 1500 µm
Standard taper ratios	2:1 3:1 4:1 5:1 or customised
Standard proof test	100 kpsi
Minimum bending radius	5–100 mm (depending on the selected fiber diameter)

Instructions for use

Fibers, fiber cables, fiber bundles



Please note the following information to ensure the long-term safe use of your fiber products:

Safety

1. The NA of the laser beam must be smaller than the NA of the fiber.
2. The laser beam must be directed towards the core diameter or fused bundle, as connectors or adhesive between the bundles may otherwise overheat.
3. It is recommended to have the laser energy distributed evenly (instead of a Gaussian distribution).

Application

1. Clean the fiber endface before switching on the laser.
2. Ensure that the ferrule and receptacle are entirely free from any contamination, as contaminants may burn in.
3. The cable / bundle surface may be cleaned with isopropyl alcohol, ideally under a microscope using a cotton bud.
4. Ensure that the optical axes are correctly aligned and not at an angle to each other, and that the focal point is correctly aligned. It is recommended to verify the alignment using a He-Ne Laser.
5. Ensure that the minimum bending radius is complied with to prevent fiber breakage.

Our Glossary

We have explained some important concepts of fiber optics below.

Please do not hesitate to contact us if you have any questions.

Fiber optics	The branch of optical technology concerned with the transmission of radiant power through fibers made of transparent materials such as glass, fused silica or plastic.
Optical fiber	(Also optical waveguide, fiber optic cable, optical cable) – a thin filament of drawn or extruded glass or plastic having a central core and a cladding of lower-index material to promote internal reflection.
Fiber bundle	A rigid or flexible, concentrated assembly of glass or plastic fibers used to transmit light.
Core	The light conducting portion of an optical fiber. It has a higher refractive index than the cladding.
Cladding	Low refractive index material that surrounds the core of an optical fiber. It contains the core light while protecting against surface scattering. The cladding can consist of fused silica, plastic or specialty materials.
Numerical aperture (NA)	In fiber optics, the NA describes the range of angles at which light can enter and exit the system. NA is an important parameter in applied fiber optics.
Ultraviolet spectrum	The invisible region of the spectrum beyond the violet end of the visible region. Wavelengths range from 10 to 400 nm.
Visible spectrum	The region of the electromagnetic spectrum to which the retina is sensitive and by which the eye sees. It extends from about 400 to 700 nm in wavelength.
Infrared spectrum	Region of the electromagnetic radiation spectrum where wavelengths range from about 700 nm to 1000 nm.
Attenuation	The phenomenon of the loss of average optical power in an optical fiber or medium.
Bend loss	Loss of power in an optical fiber due to bending of the fiber. Usually caused by exceeding the critical angle required for total internal reflection by internal light paths.
Transmission	In optics, the conduction of radiant energy through a medium. Often denotes the percentage of energy passing through an element or system relative to the amount that entered.


1
2
3
4
5
6
7
8
9

Product code key using the example of **WF NS (HEX) 400/480 /1050 (H) (B)N NA=0.26**

1 Fiber type	UV = Optran® UV WF = Optran® WF UVNSS = Optran® UVNSS NCC = Optran® NCC HUV = Optran® HUV HWF = Optran® HWF WFGE = Optran® WFGE MIR = Optran® MIR UVNS = Optran® UVNS WFNS = Optran® WFNS UVWFS = Optran® UVWFS
2 Core shape (optional)	RCT = rectangle PEN = pentagonal HEX = hexagonal
3 Core size µm	Circular = core diameter PEN, HEX, HEP, OCT = inscribed circle diameter RCT = side 1 x side 2
4 Cladding size µm	Circular = cladding diameter RCT = cladding side 1 x side 2
5 Final fiber diameter, µm	
6 Buffer (optional)	H = hard polymer buffer S = silicone buffer No information = no buffer
7 Colour (optional)	B = black BL = blue W = white Y = yellow R = red G = green No information = transparent
8 Jacket material	A = acrylate jacket (no buffer) N = nylon jacket (silicone or hard polymer jacket) T = ETFE jacket (silicone or hard polymer buffer) P = polyimide jacket (no buffer)
9 NA core to cladding	Standard 0.1 to 0.26 for WF and UV 0.12 to 0.29 for WFNS 0.15 to 0.29 for UVNS 0.37 for WFGE 0.37 to 0.57 for HUV and HWF 0.32 for PUV and PWF

Probes for medical lasers – customized for your application


Urology

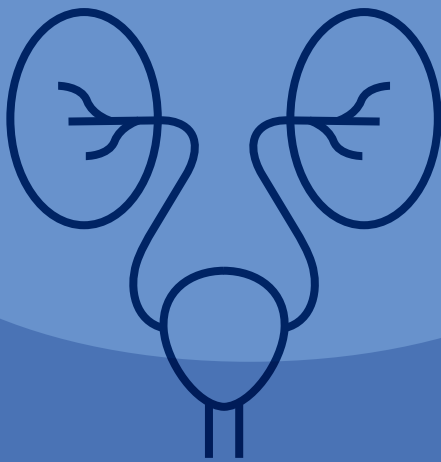

Proctology



Pneumology



Orthopedics




Gynecology



ENT



Ophthalmology



Aesthetics
dermatology



Customized optical fibers for every laser medical application



More than 30 years of experience in the development and production of optical fibers and everything that goes with them make us a reliable partner for medicine and research. For us, off-the-peg fibers are out of the question. After all, every laser medical application has its own unique requirements, which must be met. This is the only way that allows us to offer physicians precisely the right fibers and probes for different areas of application.


We develop our custom-fit solutions in-house, from the preform to the optical fiber and finished probe so we can meet your special requirements quickly and support you with our expertise. Everything from a single source, everything for your applications.

Perfectly customized

Our probes and fibers are optimally matched to your medical applications and fit all laser types. Outstanding quality and easy handling make them the first choice for modern non-invasive laser surgery.

Advantages

- Compatible with all medical lasers
- Contact and non-contact modes
- Tissue-conserving
- Precise laser guidance
- Minimal bleeding
- Decades of experience in laser technology
- Customized for each application

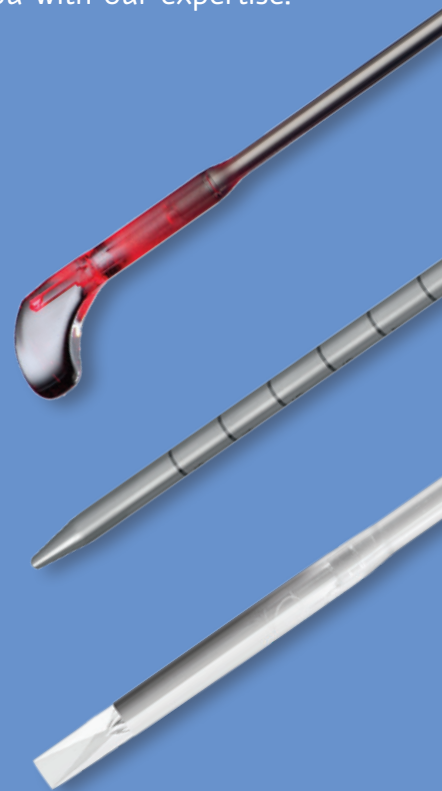

Talk to us!

Tel. +49.228.979 670
sales@ceramoptec.com

www.ceramoptec.com



CeramOptec® worldwide



Locations

Europe, Latvia
CeramOptec® SIA
Skanstes iela 7k - 1
1013 Riga, Latvia

Factory & Development
(postal address)
Domes iela 1a
5316 Livani, Latvia

Europe, Germany
CeramOptec® GmbH
Siemensstr. 44
53121 Bonn, Germany

Sales & Development
Brühler Straße 30
53119 Bonn, Germany
Tel.: +49. 228. 979670
sales@ceramoptec.com
www.ceramoptec.com

China
**biolitec laser science and
technology Shanghai Ltd.**
Shanghai
Tel.: +86. 21. 6308 8856
sales-china@ceramoptec.com

North America
CeramOptec / Biolitec
ON Canada
Tel.: +1. 437. 914 9233
carlos.pinto@ceramoptec.com

Distributors

Japan
T.E.M. Incorporated
Tokyo
Tel.: +81. 3. 5256 2052
fiber@tem-inc.co.jp
www.tem-inc.co.jp

France
OBS FIBER
Villebon sur Yvette
Tel.: +33. 1. 60 92 41 22
jcorceiro@obs-fiber.fr
www.obs-fiber.fr

Korea
Unitech International Corp.
Seoul
Tel.: +82. 2. 585 6188
esalsa@naver.com

Israel
LAS Photonics Ltd.
Ra'anana
Tel.: +972. 3. 632 6377
info@lasphotonics.com
www.lasphotonics.com

India
**New Age Instruments &
Materials (P) Ltd.**
Haryana
Tel.: +91. 124. 4086513 14
tapan@newagein.com
www.newagein.com